

CHENG'S[®] Chengs100 Company

CHENG'S100 ALTERNATING CURRENT EQUIPMENT & ELECTRIC-SWITCH LIMITED COMPANY


户外负荷开关及开关-熔断器组

Outdoor disconnecting switch and grounding switch

户外隔离开关及接地开关

Outdoor load (disconnecting) switch, Switch-fuse

$U_r=12-36kV$ $I_r=400,630,1250A$

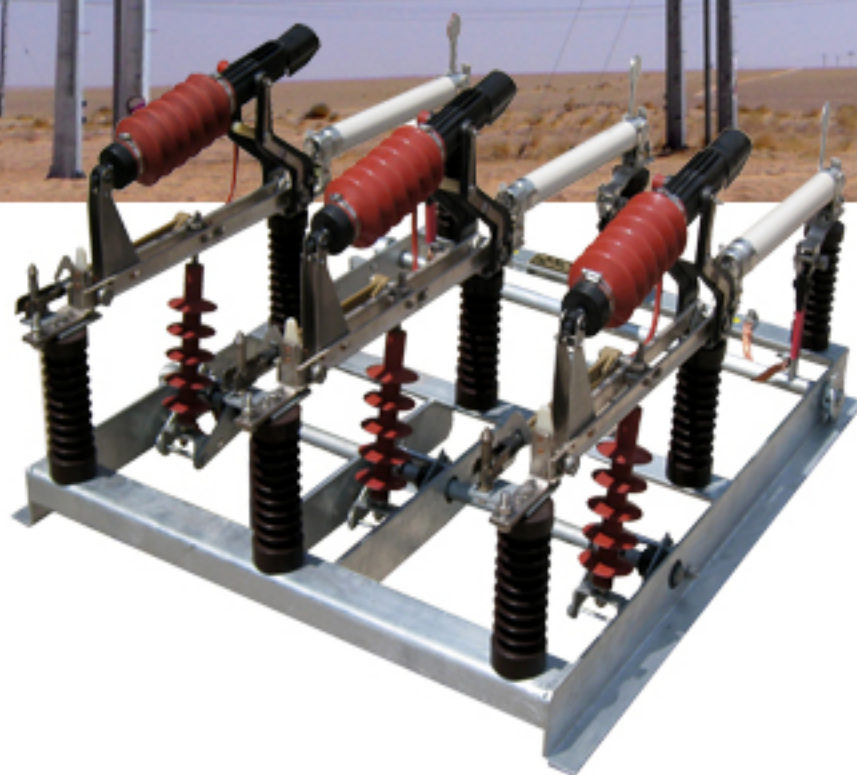

北京程氏壹佰开关有限公司

<http://www.chengs100.com>

本出版物包括产品种类

负荷(隔离)开关: 单相式/三相式, 用于辐射式/环网式线路/变压器回路。

柱上开关: 三相式/单项式, 用于开断小电流。

隔离开关: 单项式/三相式, 用于电路无电电流隔离。

熔断器底座: 三相式/单项式, 安装有高压限流熔断器, 来保护变压器等。

接地开关: 三相式/单项式可配合上述设备安装也可单独安装。

操作机构: 手动/电动

其他可选附件

电动机机构及控制器, 请参阅本公司技术出版物: 《户外马达机构执行器》; 《户外智能控制器》。这个产品是程氏壹佰(河南)智能技术公司生产。

型号说明 Give an example

G=隔离功能	Disconnecting switch
F=负荷开关	Load switch
W=户外形式	Outdoor
T=三相式	Three phase
E=单相式	Single-phase
M;MS=柱上开关	Column
AE=接地开关	Earth switch
SEA=熔断器底座	Fuse base
P=非陶瓷绝缘子	Non ceramic insulator

PRODUCT TYPES

Load (isolation) switch: single phase / three-phase type, used for radial / ring network line / transformer loop.

Column switch: three-phase / monomial for breaking off small current.

Isolation switch: monomial / three-phase, used for circuit no current isolation.

Fuse base: three phase / monomial. High voltage current limiting fuse is installed to protect transformer and so on.


Ground switch: three phase / monomial can be installed with the above equipment or installed separately.

Operating mechanism: manual / motor mechanism

Other optional accessories

Please refer to our technical publications:

Outdoor motor actuator, Outdoor intelligent controller This product is produced by CHENGSI100 (Henan) intelligent technology company

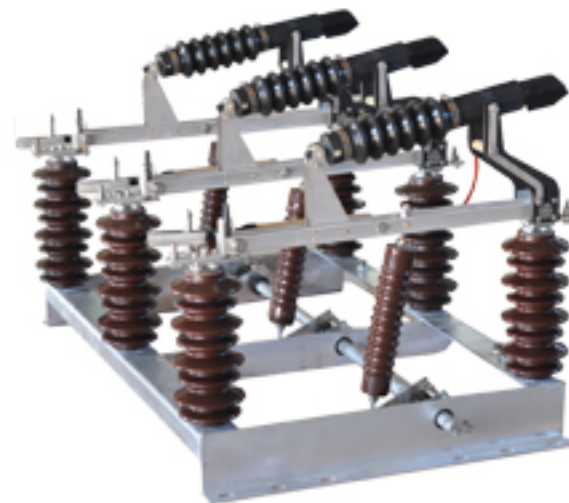

主要技术参数:

TECHNICAL PARAMETER

额定电压	规格型号	额定电流	额定有功负载开断电流	额定开断电缆充电电流	额定闭环开断电流	额定短时耐受电流	额定短时工频耐受电压	额定短时雷电冲击耐受电压
Ur		Ir	I1	I4a	I2a	Ik	Up	Uw
kV		A	A	A	A	kA	kV	kV
12	GFW(P)12	400/630/1250	400/630	35	400/630	16/25/40	42/48	75/85
24	GFW(P)24	400/630/1250	400/630	20	400/630	16/20/30	65/79	125/145
36	GFW(P)36	400/630/1250	400/630	16	400/630	16/20/30	95/118	185/215
12	GW(P)12	400/630/1250	—	—	—	25/40/63	42/48	75/85
24	GW(P)24	400/630/1250	—	—	—	25/40/63	65/79	125/145
36	GW(P)36	400/630/1250	—	—	—	25/40/63	95/118	185/215
12	GFM(P)12	400/630/1250	16	10	100	16/25/40	42/48	75/85
17.5	GFM(P)17.5	400/630/1250	16	10	100	16/25/30	38/45	95/110
24	GFM(P)24	400/630/1250	12	10	100	16/20/30	65/79	125/145
36	GFM(P)24	400/630/1250	8	10	100	16/20/30	95/118	185/215

我们出版物所列产品工作频率为50Hz,当额定频率与额定电压有特殊要求时,请与我们联系,如: 11kV,15kV,18kV,25kV,27.5kV,38kV,40.5kV

When The frequency of products listed in our publications is 50Hz. Please consult with us when there are special requirements for rated frequency and rated voltage.

11kV, 15kV,18kV, 25kV, 27.5kV, 38kV, 40.5kV.....